


6C02 Electrical Interface Module

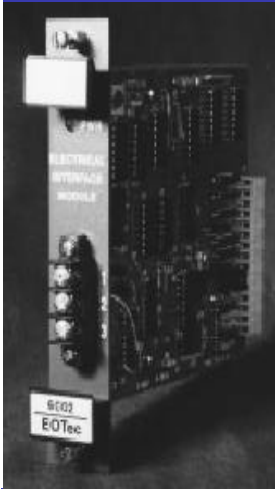

The 6C02 Module provides electrical interface for GE Fanuc Genius™ network by conditioning the electrical signals supplied to and from the GE equipment for transmission over the fiber optic network. The module obtains operating power and interconnects to other modules in the EOTec 6000 Modem via the integrated back-plane of the Model 6A02 Modular Rack.

The simplest modem configuration consists of a Power Supply, an Electrical Interface, and an Optical Interface Module. However, additional modules may be added to configure Daisy Chain, Star, Self-Healing Ring topologies and provide Redundancy. A maximum combination of five optical or electrical modules may be connected together in one modem.

SPECIFICATIONS

Mechanical:

Mounting: Slot 5 of the 6A02 Modular Rack with the Master/Slave switch in the Master position
Slot 1 through 4 of the Modular Rack with the switch in the Slave position

Weight: < 7oz (200g)

Baud Rate: 153.6K Baud, Extended

Copper Cable Connector: .375" Screw Terminal Barrier Strip

Cable End Termination: External, User Supplied, Based on Cable Impedance

Maximum Devices and Copper Cable Length Supported per Module: 8 Devices, 50 feet maximum

Power Indicator: Green LED



Ambient Conditions: -40°C to 80°C Storage
0°C to 70°C Operational
0 to 90% Relative Humidity Non-Condensing

Genius is a trademark of GE Fanuc

