



## 2A06 Power Supply Module



The 2A06 Power Supply Module supplies operating power to the EOTec 2000 Modem.


The basic modem configuration consists of a Power Supply Module, Electrical Interface Module, and an Optical Interface Module. However, additional Power Supply modules may be added to address Redundant Power Supply applications. A maximum combination of five optical or electrical modules may be powered from one supply, inter-module communications and operating power is achieved through the integrated module interconnections.

### SPECIFICATIONS

#### Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz ( 250g )

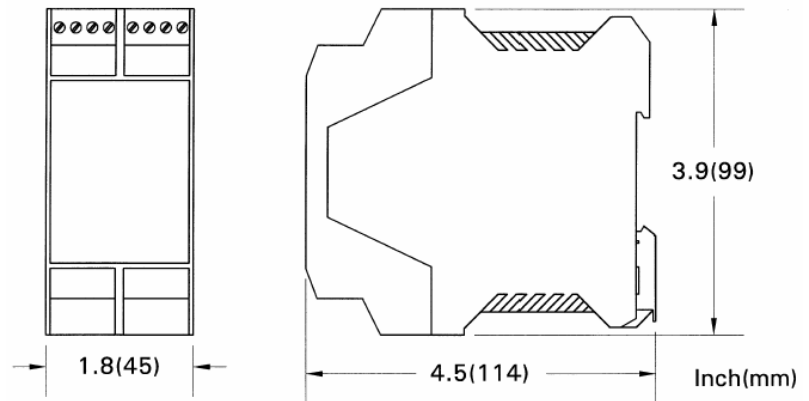

Input Power Range:	90 to260 VAC, 50/60Hz, 400mA 120 to260 VDC, 400mA
Operating Power Output:	Regulated, 9VDC, 1.1A Max
Input Connection:	Pluggable Screw Terminal Block 12 to 24 AWG Cage-Clamp
Input Fuse Type:	400 mA slow-blow
Power On Indicator:	Green LED
Ambient Conditions:	-40°C to 85°C Operational 0 to 95% Relative Humidity Non-Condensing

