



Weed Instrument

Fiber Optics



EOTec 2000

## 2E09 Optical Interface Module



The 2E09 Optical Interface Module connects the EOTec 2000 modem with the fiber cable network allowing the optical signals to be transmitted to and received from another fiber optic modem.


Two optical modules can be used in one modem to form an optical repeater or configure an Optical Daisy Chain. Up to five optical modules can be cascaded to form an optical Star network. Two optical modules combined with a Self-Healing Ring module provide optical media Redundancy in critical applications. A maximum combination of five optical or electrical modules may be connected together in one modem, inter-module communications and operating power is achieved through the integrated module interconnections.

### SPECIFICATIONS


#### Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz ( 250g )

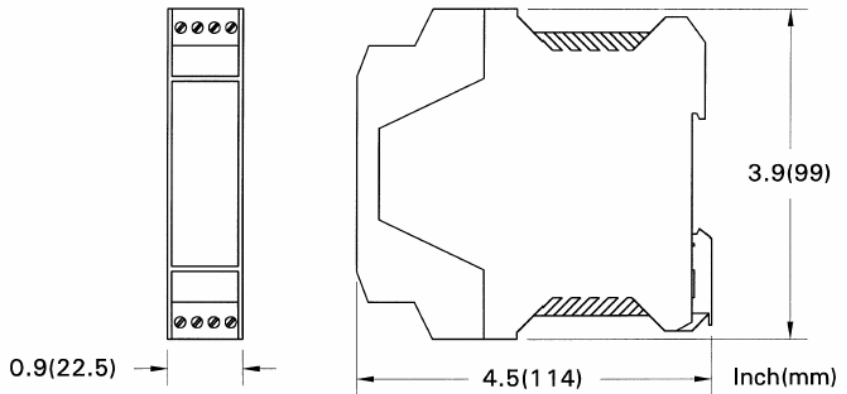

Optical Wavelength:	1300nm, Multi-Mode
Communications Data Rates:	9.6K Baud to 12M Baud
Optical Port Connection:	ST* Compatible
Optical Dynamic Range:	12dB utilizing 62.5/125 Fiber
Optical Transmit Indicator:	Green LED
Optical Receive Indicator:	Amber LED
Ambient Conditions:	-40°C to 80°C Operational 0 to 95% Relative Humidity Non-Condensing

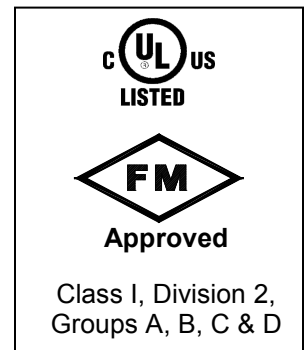

Class I, Division 2,  
Groups A, B, C & D



\* ST is a registered trademark of AT&T



Weed Instrument, P.O. Box 300, Round Rock, Texas 78680  
 Shipping: 707 Jeffrey Way, Round Rock, TX 78664  
 Phone: (512) 434-2850, Toll Free: (800) 880-9333, Fax: (512) 434-2851  
 Mail: [fiberop@weedinstrument.com](mailto:fiberop@weedinstrument.com)  
 Home Page: <http://www.weedinstrument.com>

Rev. 6/2004  
Pub: RM0900602