



Weed Instrument

Fiber Optics



EOTec 2000

2E19 Optical Interface Module



The 2E19 Optical Interface Module connects the EOTec 2000 modem with the fiber cable network allowing the optical signals to be transmitted to and received from another fiber optic modem.


Two optical modules can be used in one modem to form an optical repeater or configure an Optical Daisy Chain. Up to five optical modules can be cascaded to form an optical Star network. Two optical modules combined with a Self-Healing Ring module provide optical media Redundancy in critical applications. A maximum combination of five optical or electrical modules may be connected together in one modem, inter-module communications and operating power is achieved through the integrated module interconnections.

SPECIFICATIONS

Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz (250g)

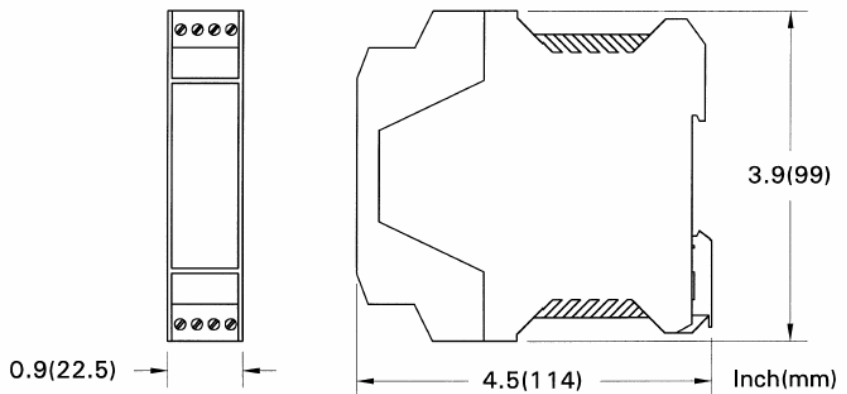

Optical Wavelength: 1300nm, Multi-Mode

Communications Data Rates: 9.6K Baud to 12M Baud

Optical Port Connection: ST* Compatible

Optical Dynamic Range: 17dB utilizing 62.5/125 Fiber

Optical Transmit Indicator: Green LED

Optical Receive Indicator: Amber LED

Ambient Conditions: -40°C to 85°C Operational
0 to 95% Relative Humidity Non-Condensing



Class I, Division 2,
Groups A, B, C & D



* ST is a registered trademark of AT&T



Weed Instrument, P.O. Box 300, Round Rock, Texas 78680
 Shipping: 707 Jeffrey Way, Round Rock, TX 78664
 Phone: (512) 434-2850, Toll Free: (800) 880-9333, Fax: (512) 434-2851
 Mail: fiberop@weedinstrument.com
 Home Page: <http://www.weedinstrument.com>

Rev. 5/2004
Pub: RM0900602