




6C29 Electrical Interface Module

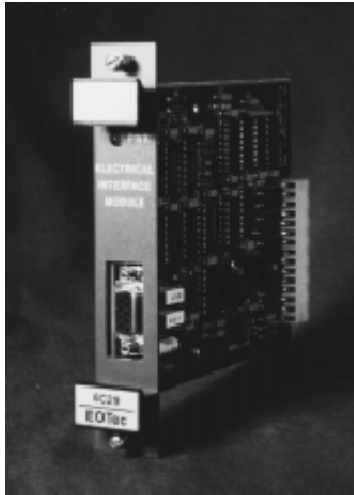

The 6C29 Module provides electrical interface for Modicon Modbus Plus™ by conditioning the electrical signals supplied to and from Modicon equipment for transmission over the fiber optic network. The module obtains operating power and interconnects to other modules in the EOTec 6000 Modem via the integrated backplane of the Model 6A02 Modular Rack.

The simplest modem configuration consists of a Power Supply, an Electrical Interface, and an Optical Interface Module. However, additional modules may be added to configure Daisy Chain, Star, Self-Healing Ring topologies and provide Redundancy. A maximum combination of five optical or electrical modules may be connected together in one modem.

SPECIFICATIONS

Mechanical:

Mounting: Slot 5 of the 6A02 Modular Rack with the Master/Slave switch in the Master position
Slot 1 through 4 of the Modular Rack with the switch in the Slave position

Weight: < 7oz (200g)

Baud Rate: 1M Baud


Copper Cable Connector: DB-9 pin

Copper Cable End Termination: External, User Supplied, Modicon Connectors

Maximum Modicon Units and Cable Length Supported per Module: Modicon Modbus Plus Specifications Apply

Power Indicator: Green LED

Ambient Conditions: -40°C to 80°C Storage
0°C to 70°C Operational
0 to 90% Relative Humidity Non-Condensing



Weed Instrument, P.O. Box 300, Round Rock, Texas 78680
Shipping: 707 Jeffrey Way, Round Rock, TX 78664
Phone: (512) 434-2850, Toll Free: (800) 880-9333, Fax: (512) 434-2851
Mail: fiberop@weedinstrument.com
Home Page: <http://www.weedinstrument.com>

Rev. 3/2002
Pub: RM0900562