

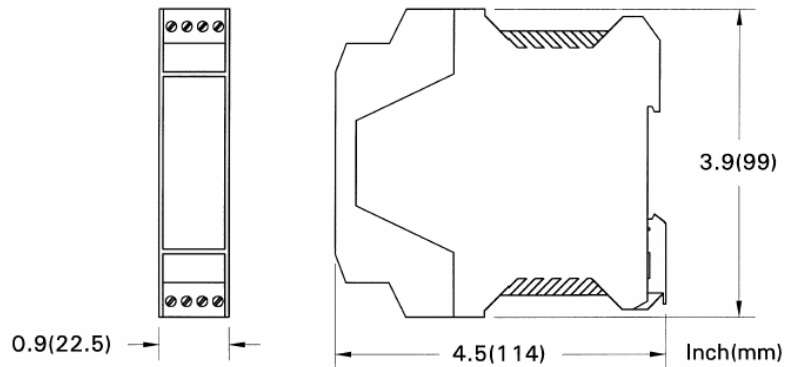
2E55 Switched Media Converter


The 2E55 Switched Media Converter Module provides fiber optic conversion to and from wire based Ethernet. The Fiber port operates at 100Mbps and the RJ45 port will auto-negotiate its data rate between 10/100Mbps, Full/Half duplex operation. The 2E55 will automatically learn the addresses of the devices connected to each port (up to 1024) and will buffer and route messages accordingly. Visual (LED) indicators display the status of all ports/links. There is an additional Ethernet port in the module's integrated BUS interconnections. This BUS port provides connection for **one** additional EOTec 2000 Ethernet Switch Module or Switched Media Converter Module assisting in forming star or daisy chain network configurations.

SPECIFICATIONS
Mechanical:

Mounting: 35mm DIN Rail

Weight: < 6oz (170g)


Power Requirements: 10 to 30Vdc @ 300mA, Connection via pluggable cage-clamp screw terminal block

Ethernet Compliance: IEEE 802.3(U)(X) Compliant, All standard protocols

Wire Connection Ports

 RJ45 Port: 10 or 100Mbps (10/100Base-T(X)), Full or Half Duplex, Auto-negotiating, 328ft/100m
 BUS Port: 100Mbps (100Base-TX), Full Duplex, connection to one additional module maximum

Optical Ports

 Wavelength: 1300nm
 Data Rate: 100Mbps (100Base-FX), Full Duplex
 Connectors: ST compatible (ST is a trademark of AT&T)
 Fiber Type/Size: Multi-Mode fiber; 50 to 100µm core diameter
 Dynamic Range: Power out -20dBm, Receive sensitivity -32dBm, 6560ft/2km

Status Indicators

Power:	Green LED;	On when proper power is connected
Port Activity:	Green LED;	Off when no connection is detected on port On with connection to port established Flashing to indicate activity on port
Port Speed (RJ45):	Amber LED;	Off when data rate is 10Mbps On when data rate is 100Mbps

Ambient Conditions: -40°C to 85°C Operational
 0 to 95% Relative Humidity Non-Condensing
