



# Threaded Thermowells Standard(S) & Heavy Duty(H)


Available in 260 bore for 1/4" diameter sensors and 385 bore for 3/8" diameter sensors.

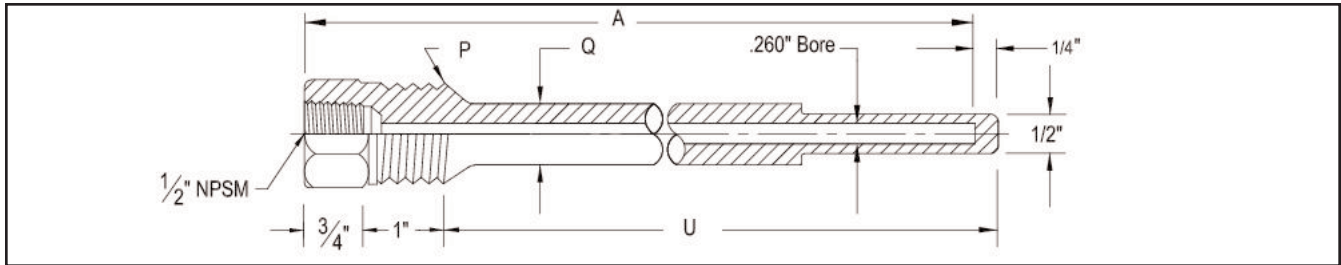


Standard Duty (S), .260" Bore (Stepped)

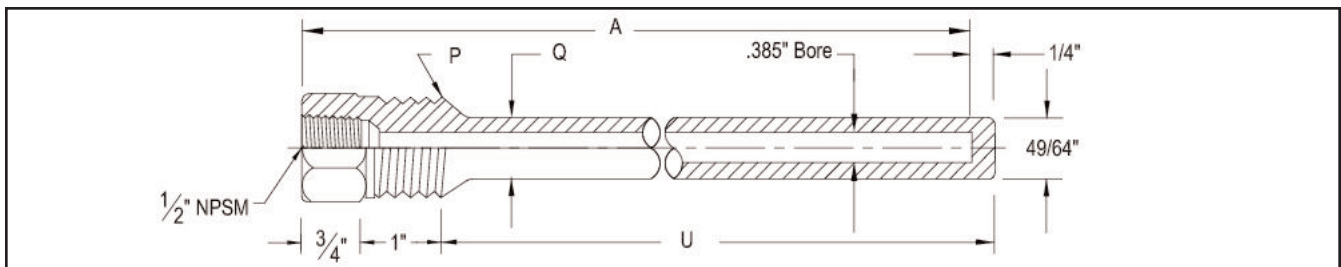

Standard Duty (S), .385" Bore (Straight)

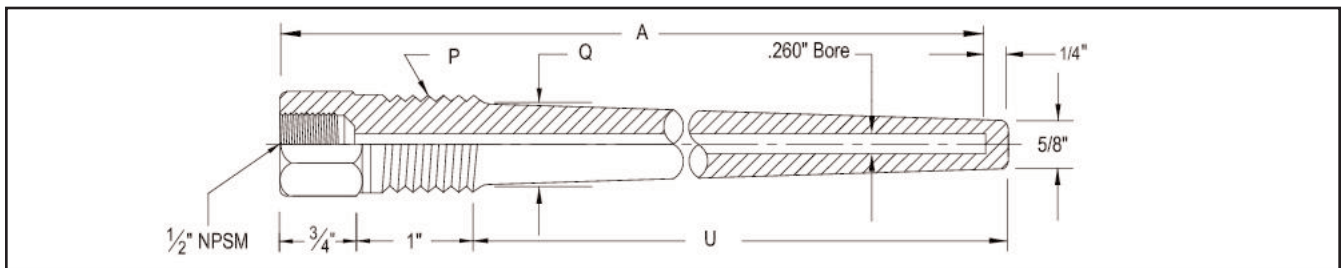

Heavy Duty (H), .260" Bore (Tapered)

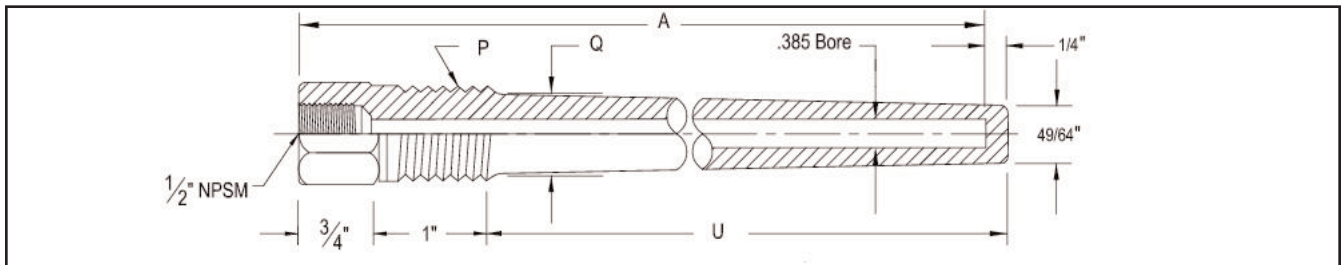

Heavy Duty (H), .385" Bore (Tapered)

Process Connection	External Thread = "P"				
1/2	1/2" NPT Thread Size (N/A for "H" Heavy Duty)				
3/4	3/4" NPT Thread Size				
1	1" NPT Thread Size				
	Model	Bore and Thermowell Type			
	S260	.260" Bore - Standard Duty			
	S385	.385" Bore - Standard Duty			
	H260	.260" Bore - Heavy Duty			
	H385	.385" Bore - Heavy Duty			
	Insertion Length	Stem Length "A"	Insertion Length "U"	Shank Diameter "Q"	
	U2 1/2	4"	2 1/2"	For S: 1/2" NPT:	5/8" (N/A for 2 1/2")
	U4 1/2	6"	4 1/2"	For S: 3/4" NPT:	3/4"
	U7 1/2	9"	7 1/2"	For S: 1" NPT:	7/8"
	U10 1/2	12"	10 1/2"	For H: 3/4" NPT:	7/8"
	U13 1/2	15"	13 1/2"	For H: 1" NPT:	1 1/16"
	U16 1/2	18"	16 1/2"		
	U22 1/2	24"	22 1/2"		
	Other	Consult Factory			
	Material	Thermowell Material			
	316SS	AISI-316 SS - <b>Standard</b>			
	304SS	AISI-304 SS			
	Brass	Brass			
	CS	Carbon Steel			
	Monel	Monel 400			
	Other	Consult Factory			

3/4	-	S260	-	U4 1/2	-	316SS
Sample Model Number						
-	-	-	-	-	-	-
Your Model Number						

**Specifications:**

Process Connection "P":	1/2", 3/4" & 1" NPT are standard (1 1/4" and 1 1/2" are available).
Thermowell Style:	Specify style and bore.
Insertion Length "U":	From bottom of threads to tip of thermowell . Standard sizes listed - other sizes available.
Materials:	Standard materials listed - others available. Refer to the Corrosive Service Guide in the Thermowell General Specifications to determine suitable material for specific application.
Instrument Connection Size:	1/2" NPSM internal thread is standard (1/2" or 3/4" NPT available).
Cap & Chain:	Brass cap and chain is available for keeping well bore clean when not in use. Add "CC" to the end of your model number to order this option.