




EOTec 6000

6A02 Modular Rack

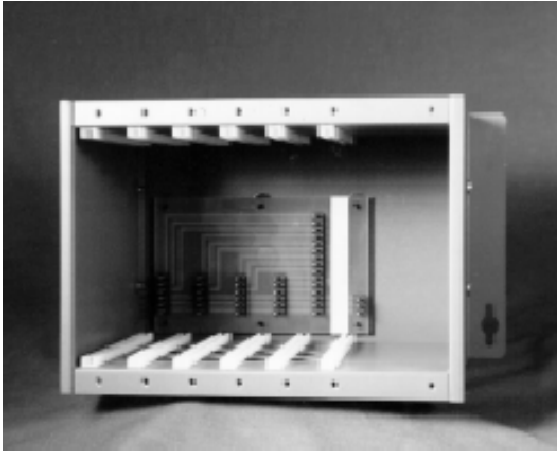


The 6A02 Modular Rack supplies the structural integrity and provides the integrated Backplane connection for all other modules in the EOTec 6000 Modem. The flexible modular design of the EOTec 6000 system provides simple configuration and easy expansion and upgrading.

A basic Point-to-Point fiber modem configuration consists of the 6A02 Modular Rack, a Power Supply Module, an Electrical Interface Module, and an Optical Interface Module. However, the 6A02 can accommodate a maximum combination of five optical or electrical modules and one power supply module to address topology configurations such as Star, Daisy-Chain, Self-Healing Ring and Redundancy applications.

SPECIFICATIONS

Mechanical:

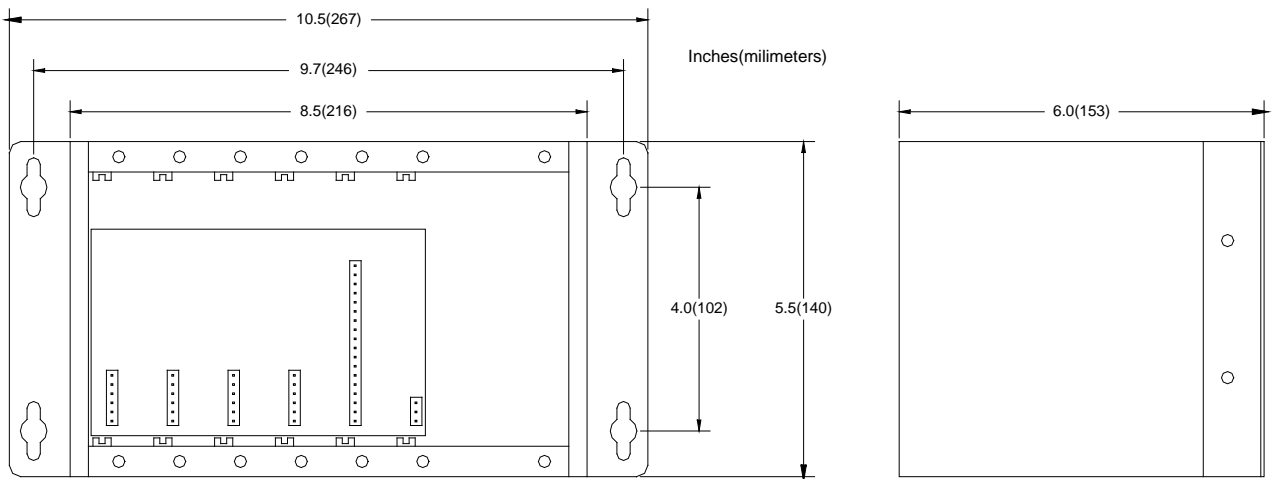

Mounting: Wall/Panel Mount (Standard), 19" Rack Mount (Optional with Model 6A09 & 6A10)

Weight: < 3lb (1.4kg) Empty, < 7lb (3.2kg) Fully Populated

Material: Painted Steel

Capacity: Slots 1 through 4, Slave Module Slots, Optical or Electrical Interface Modules
Slot 5, Master Module Slot, Electrical Interface or Self-Healing Ring Modules
Slot 6, Power Supply Module Slot

Ambient Conditions: -40°C to 80°C Storage
0°C to 70°C Operational
0 to 90% Relative Humidity Non-Condensing

